



# Oslo

## PD-12800~PD-12821

Our Oslo fixtures are more air than anything else. They are big open globes that house a variety of lamps and modular LEDs. Just right for contemporary and traditional spaces. Oslo is made from thick rolled straps that are joined together at intersections by traditional tinner's rivets. The effect of these joints is to create an old time armillary sphere, just without the north-pointing arrow. These are stylish lights with enough interlocking components to make conversations about them long lasting and profound. Oslo can be ordered in a wide variety of sizes, lampings, and metal finishes.

### ~Oslo Series~

Chandelier: CH-12801~CH-12815

Pendant: PD-12800~PD-12821

Ceiling Mt: CL-12800~CL-12808

Wall Mt: SC-12800~SC-12811

Bollard: BL-12800~BL-12811

**Mounting:** Lightsmith fixtures mount to standard 4" octagon electrical boxes unless otherwise specified. All hardware and canopies supplied.

**Listing and Warranty:** Lightsmith fixtures are Underwriters Laboratories listed and carry a standard three year warranty against defects in materials and labor beginning at date of shipment.



## Fixture Specifications

**PD-128**  
FIXTURE NUMBER  
(Example: PD-12800)

~  
**DIFFUSER**  
(Example: BGA-ECH)


~  
**METAL FINISH**  
(Example: ABB)

~  
**VOLTAGE**  
 (120V)  
 (277V)  
 (347V)

~  
**STEM=**S+Lgth  
(Example: S-96")  
**CHAIN=**C+Lgth  
(Example: C-96")  
NR=Not required

~  
**OPTIONS**  
(Example: DIM, REM)

~  
**MODIFICATIONS**  
(Example: Custom Paint\*)  
Use "Notes" Box At Top To Explain Modifications

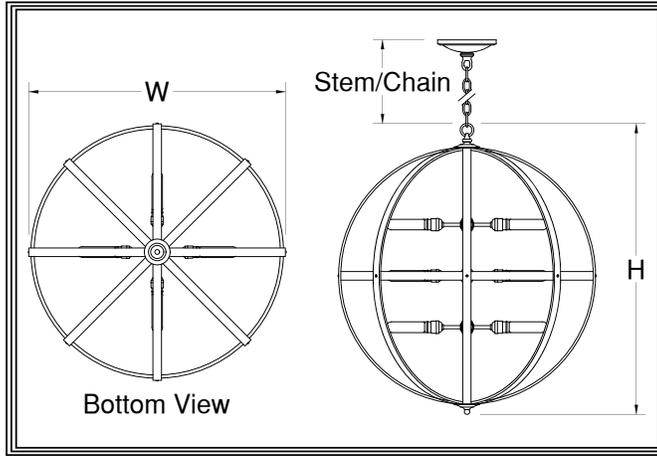

**PD-128**

Fixture Number      Job Type

Job Name

Notes~Modifications

	Fixture Number	Dimensions	Lamping	Weight	Stem/Chain	Options
LED	<input type="checkbox"/> PD-12809	24w x 27h	2-13wL(2820 lm)	13 lbs	3' Std	IEM, REM, SPR**
	<input type="checkbox"/> PD-12810	30w x 34h	4-13wL(5640 lm)	21 lbs	6' Std	L313, L52
	<input type="checkbox"/> PD-12811	36w x 41h	6-13wL(8460 lm)	25 lbs	9' Std	L313, L52
	<input type="checkbox"/> PD-12812	48w x 55h	12-13wL(16920 lm)	27 lbs	9' Std	L323, L83
	<input type="checkbox"/> PD-12813	60w x 68h	16-13wL(22560 lm)	33 lbs	12' Std	L323, L83
INCANDESCENT	<input type="checkbox"/> PD-12820	24w x 27h	4-75wA(4800 lm)	11lbs	3' Std	L38
	<input type="checkbox"/> PD-12800	30w x 34h	8-75wA(9600 lm)	17 lbs	6' Std	L52
	<input type="checkbox"/> PD-12821	36w x 41h	12-75wA(14400 lm)	19 lbs	9' Std	L52
	<input type="checkbox"/> PD-12801	48w x 55h	16-75wA(19200 lm)	25 lbs	9' Std	L83
	<input type="checkbox"/> PD-12802	60w x 68h	20-75wA(24000 lm)	30 lbs	12' Std	L83
FLUORESCENT	<input type="checkbox"/>					

~Single Circuit Standard Wiring~

\*\*All LED Fixtures

**DIFFUSER**

**FRA: Fresh air!!!!**

	SOLID BRASS FINISHES	PAINTED METAL FINISHES	ALUMINUM FINISHES	STAINLESS STEEL FINISHES
METAL FINISH	<input type="checkbox"/> <b>ABB:</b> Antique Brass	<input type="checkbox"/> <b>DGP:</b> Dark Green	<input type="checkbox"/> <b>SAA:</b> Satin Aluminum	<input type="checkbox"/> <b>NA</b>
	<input type="checkbox"/> <b>SBB:</b> Satin Brass	<input type="checkbox"/> <b>VGP:</b> Verde Green	<input type="checkbox"/> <b>SNA:</b> Satin Nickel	<input type="checkbox"/>
	<input type="checkbox"/> <b>PBB:</b> Polished Brass	<input type="checkbox"/> <b>CGP:</b> Charcoal Gray	<input type="checkbox"/> <b>PAA:</b> Polished Aluminum	<input type="checkbox"/>
	<input type="checkbox"/> <b>ANB:</b> Antique Nickel	<input type="checkbox"/> <b>MBP:</b> Medium Bronze	<input type="checkbox"/> <b>BBA:</b> Burnished Bronze	<input type="checkbox"/>
	<input type="checkbox"/> <b>SNB:</b> Satin Nickel	<input type="checkbox"/> <b>SBP:</b> Satin Black	<input type="checkbox"/> <b>RNA:</b> Red Naval Bronze	<input type="checkbox"/>
	<input type="checkbox"/> <b>PNB:</b> Polished Nickel	<input type="checkbox"/> <b>DBP:</b> Dark Bronze	<input type="checkbox"/> <b>SGA:</b> Satin Gold	<input type="checkbox"/>
	<input type="checkbox"/> <b>AZB:</b> Antique Bronze	<input type="checkbox"/> <b>LBP:</b> Light Bronze	<input type="checkbox"/> <b>SBA:</b> Satin Bronze	<input type="checkbox"/>
	<input type="checkbox"/> <b>SZB:</b> Satin Bronze	<input type="checkbox"/> <b>MGP:</b> Medium Gold	<input type="checkbox"/> <b>ORA:</b> Oil Rubbed Bronze	<input type="checkbox"/>
	<input type="checkbox"/> <b>PZB:</b> Polished Bronze	<input type="checkbox"/> <b>SCP:</b> Sponged Copper	<input type="checkbox"/> <b>SCA:</b> Satin Copper	<input type="checkbox"/>
	<input type="checkbox"/> <b>CSB:</b> Custom Brass*	<input type="checkbox"/> <b>CSP:</b> Custom Paint*	<input type="checkbox"/> <b>CSA:</b> Custom Aluminum*	<input type="checkbox"/>

**OPTIONS**

**L38:** 38wLED R40 Downlight

**L52:** 52wLED R40 Downlight

**L83:** 83wLED R40 Downlight

**DIM:** Dimming Driver (std)

**REM:** Remote Emer.Driver

**L313:** 3-13wCLEU Uplight

**L323:** 3-23wCLEU Uplight

**SPR:** Surge protector

**IEM:** Integral Emer.Ballast