



Randers2

SC-14505~SC-14516

Our Randers fixtures are a wide variety of shapes and sizes and styles featuring an underlying motif of square bar accents in everything. Randers lights are solid glass fixtures meant for finer offices and conference centers. Their simplicity makes a powerful statement of architectural intent. It also blends well with today's lean buildings. The lights themselves are always made from non-ferrous metals as a framework around solid glass panels and cylinders. You can order Randers as a solid chrome or polished brass frame. Glass can be white or etched clear as desired.

~Randers2 Series~

Chandelier: CH-14500~CH-14511

Pendant: PD-14500~PD-14521

Ceiling Mt: CL-14500~CL-14508

Wall Mt: SC-14505~SC-14516

Bollard: BL-14500~BL-14511

Mounting: Lightsmith fixtures mount to standard 4" octagon electrical boxes unless otherwise specified. All hardware and canopies supplied.

Listing and Warranty: Lightsmith fixtures are Underwriters Laboratories listed and carry a standard three year warranty against defects in materials and labor beginning at date of shipment.



Fixture Specifications

SC-145
FIXTURE NUMBER
(Example: SC-14505)

~ **DIFFUSER**
(Example: CLG-ECH)


~ **METAL FINISH**
(Example: ABB)

~ **VOLTAGE**
 (120V)
 (277V)
 (347V)

~ **NR**
STEM=S+Lgth
(Example:S-96")
CHAIN=C+Lgth
(Example:C-96")
NR=Not required

~ **OPTIONS**
(Example:SPR)

~ **MODIFICATIONS**
(Example:Custom Paint*)
Use "Notes" Box At Top To Explain Modifications

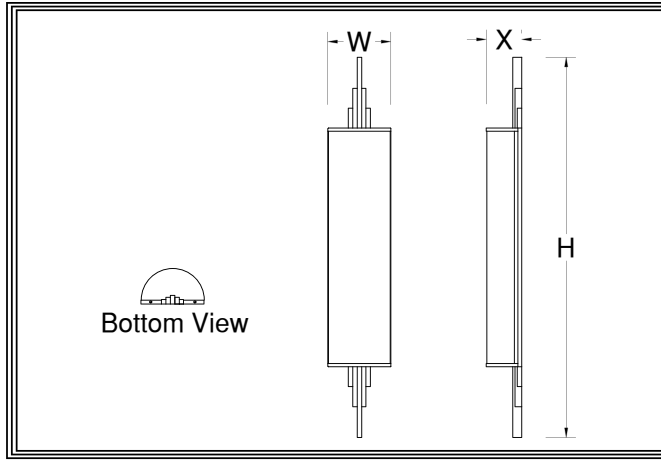

SC-145

Fixture Number Job Type

Job Name

Notes~Modifications

	Fixture Number	Dimensions	Lamping	Weight	Options
LED	<input type="checkbox"/> SC-14505	7w x 43h x 4x*	2-13wL(2820 lm)	16 lbs	WLM
	<input type="checkbox"/> SC-14506	9w x 54h x 5x	3-13wL(4230 lm)	20 lbs	WLM
	<input type="checkbox"/> SC-14507	11w x 66h x 6x	4-13wL(5640 lm)	30 lbs	WLM
INCANDESCENT	<input type="checkbox"/> SC-14514	7w x 43h x 4x*	2-60wA(1600 lm)	15 lbs	WLM
	<input type="checkbox"/> SC-14515	9w x 54h x 5x	2-75wA(2400 lm)	18 lbs	WLM
	<input type="checkbox"/> SC-14516	11w x 66h x 6x	3-75wA(3600 lm)	27 lbs	WLM
FLUORESCENT	<input type="checkbox"/>				IEM,REM,SPR**

*ADA fixture

~Single Circuit Standard Wiring~

**All LED Fixtures

DIFFUSER

WOG: White Opal Glass

CLG: Clear Glass

ECH: Etched*

*Etched option creates a matte, non-glossy finish on one side of the diffuser. (Example:WOA-ECH)

	SOLID BRASS FINISHES	PAINTED METAL FINISHES	ALUMINUM FINISHES	STAINLESS STEEL FINISHES
METAL FINISH	<input type="checkbox"/> ABB: Antique Brass	<input type="checkbox"/> DGP: Dark Green	<input type="checkbox"/> SAA: Satin Aluminum	<input type="checkbox"/> NA
	<input type="checkbox"/> SBB: Satin Brass	<input type="checkbox"/> VGP: Verde Green	<input type="checkbox"/> SNA: Satin Nickel	<input type="checkbox"/>
	<input type="checkbox"/> PBB: Polished Brass	<input type="checkbox"/> CGP: Charcoal Gray	<input type="checkbox"/> PAA: Polished Aluminum	<input type="checkbox"/>
	<input type="checkbox"/> ANB: Antique Nickel	<input type="checkbox"/> MBP: Medium Bronze	<input type="checkbox"/> BBA: Burnished Bronze	<input type="checkbox"/>
	<input type="checkbox"/> SNB: Satin Nickel	<input type="checkbox"/> SBP: Satin Black	<input type="checkbox"/> RNA: Red Naval Bronze	<input type="checkbox"/>
	<input type="checkbox"/> PNB: Polished Nickel	<input type="checkbox"/> DBP: Dark Bronze	<input type="checkbox"/> SGA: Satin Gold	<input type="checkbox"/>
	<input type="checkbox"/> AZB: Antique Bronze	<input type="checkbox"/> LBP: Light Bronze	<input type="checkbox"/> SBA: Satin Bronze	<input type="checkbox"/>
	<input type="checkbox"/> SZB: Satin Bronze	<input type="checkbox"/> MGP: Medium Gold	<input type="checkbox"/> ORA: Oil Rubbed Bronze	<input type="checkbox"/>
	<input type="checkbox"/> PZB: Polished Bronze	<input type="checkbox"/> SCP: Sponged Copper	<input type="checkbox"/> SCA: Satin Copper	<input type="checkbox"/>
	<input type="checkbox"/> CSB: Custom Brass*	<input type="checkbox"/> CSP: Custom Paint*	<input type="checkbox"/> CSA: Custom Aluminum*	<input type="checkbox"/>

OPTIONS

WLM: Wet Location Mounting

REM: Remote Emer.Ballast

IEM: Internal Emer. Ballast

SPR: Surge protector