



**Arborg**

**PD-14609~PD-14631**

Our Arborg pendants are long, seamless acrylic cylinders meant for tall spaces that need a complimentary fixture to focus attention to the building and surroundings. They are a great source of usable footcandles as well. The largest of the pendants can provide almost 30,000 footcandles and another 13,000 on top of that with the optional 83w LED downlight. We mean for Arborg lights to be a lean workhorse in places needing visual power. These lights are available in a variety of finishes. The cylinders can be standard gloss or matte etched as required.

**~Arborg Series~**

Pendant: **PD-14609~PD-14631**


**Mounting:** Lightsmith fixtures mount to standard 4" octagon electrical boxes unless otherwise specified. All hardware and canopies supplied.

**Listing and Warranty:** Lightsmith fixtures are Underwriters Laboratories listed and carry a standard three year warranty against defects in materials and labor beginning at date of shipment.



**Fixture Specifications**

<b>PD-146</b> FIXTURE NUMBER (Example: PD-14609)	~	<b>DIFFUSER</b> (Ex:WOA-ECH)	~	<b>METAL FINISH</b> (Example: ABB)	~	<b>VOLTAGE</b> <input type="checkbox"/> (120V) <input type="checkbox"/> (277V) <input type="checkbox"/> (347V)	~	<b>CABLE=C+Lgth</b> (Example:C-96")  NR=Not required	~	<b>OPTIONS</b> (Example:DIM,REM)	~	<b>MODIFICATIONS</b> (Example:Custom Paint*) Use "Notes" Box At Top To Explain Modifications
--	---	---------------------------------	---	---------------------------------------	---	---	---	---	---	-------------------------------------	---	--

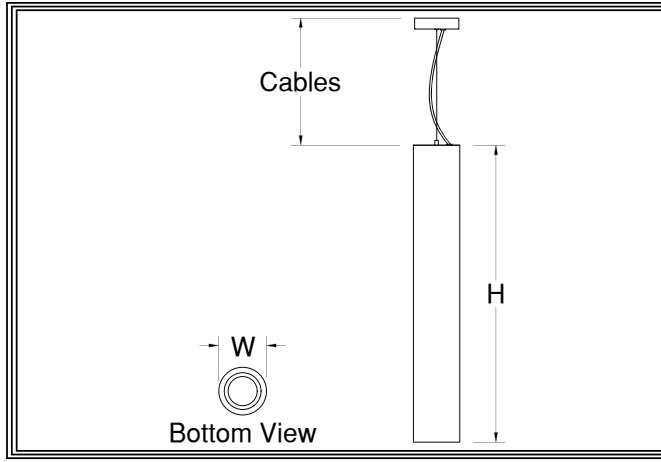

**PD-146** \_\_\_\_\_

Fixture Number      Job Type

\_\_\_\_\_

Job Name

\_\_\_\_\_

Notes~Modifications

	Fixture Number	Dimensions	Lamping	Weight	Cables	Options
LED	<input type="checkbox"/> PD-14609	4w x 48h	4-13wL(5640 lm)	18 lbs	3' Std	L38
	<input type="checkbox"/> PD-14610	6w x 60h	8-13wL(11280 lm)	25 lbs	6' Std	L52
	<input type="checkbox"/> PD-14611	8w x 72h	12-13wL(16920 lm)	32 lbs	9' Std	L52
	<input type="checkbox"/> PD-14612	10w x 84h	16-13wL(22560 lm)	40 lbs	9' Std	L83
	<input type="checkbox"/> PD-14613	12w x 96h	20-13wL(28200 lm)	51 lbs	12' Std	L83
FLUORESCENT	<input type="checkbox"/> PD-14630	4w x 48h	4-F14WT4HO(5400 lm)	16 lbs	3' Std	L38
	<input type="checkbox"/> PD-14603	6w x 60h	4-F21WT5HO (8400 lumens)	21 lbs	6' Std	L52
	<input type="checkbox"/> PD-14631	8w x 72h	4-F28WT5HO (11600 lumens)	28 lbs	9' Std	L52
	<input type="checkbox"/> PD-14604	10w x 84h	4-F35WT5HO (14600 lumens)	36 lbs	9' Std	L83
	<input type="checkbox"/> PD-14605	12w x 96h	(8) F21WT5HO (16800 lumens)	45 lbs	12' Std	L83

~Single Circuit Standard Wiring~

\*\*All LED Fixtures

DIFFUSER	<input type="checkbox"/>	<input type="checkbox"/> <b>WOA:</b> White Opal Acrylic	<input type="checkbox"/> <b>ECH:</b> Etched*
	<input type="checkbox"/>		<i>*Etched option creates a matte, non-glossy finish on one side of the diffuser. (Example:WOA-ECH)</i>
	<input type="checkbox"/>		
	<input type="checkbox"/>		
	<input type="checkbox"/>		

	SOLID BRASS FINISHES	PAINTED METAL FINISHES	ALUMINUM FINISHES	STAINLESS STEEL FINISHES
METAL FINISH	<input type="checkbox"/> <b>ABB:</b> Antique Brass	<input type="checkbox"/> <b>DGP:</b> Dark Green	<input type="checkbox"/> <b>SAA:</b> Satin Aluminum	<input type="checkbox"/> <b>NA</b>
	<input type="checkbox"/> <b>SBB:</b> Satin Brass	<input type="checkbox"/> <b>VGP:</b> Verde Green	<input type="checkbox"/> <b>SNA:</b> Satin Nickel	<input type="checkbox"/>
	<input type="checkbox"/> <b>PBB:</b> Polished Brass	<input type="checkbox"/> <b>CGP:</b> Charcoal Gray	<input type="checkbox"/> <b>PAA:</b> Polished Aluminum	<input type="checkbox"/>
	<input type="checkbox"/> <b>ANB:</b> Antique Nickel	<input type="checkbox"/> <b>MBP:</b> Medium Bronze	<input type="checkbox"/> <b>BBA:</b> Burnished Bronze	<input type="checkbox"/>
	<input type="checkbox"/> <b>SNB:</b> Satin Nickel	<input type="checkbox"/> <b>SBP:</b> Satin Black	<input type="checkbox"/> <b>RNA:</b> Red Naval Bronze	<input type="checkbox"/>
	<input type="checkbox"/> <b>PNB:</b> Polished Nickel	<input type="checkbox"/> <b>DBP:</b> Dark Bronze	<input type="checkbox"/> <b>SGA:</b> Satin Gold	<input type="checkbox"/>
	<input type="checkbox"/> <b>AZB:</b> Antique Bronze	<input type="checkbox"/> <b>LBP:</b> Light Bronze	<input type="checkbox"/> <b>SBA:</b> Satin Bronze	<input type="checkbox"/>
	<input type="checkbox"/> <b>SZB:</b> Satin Bronze	<input type="checkbox"/> <b>MGP:</b> Medium Gold	<input type="checkbox"/> <b>ORA:</b> Oil Rubbed Bronze	<input type="checkbox"/>
	<input type="checkbox"/> <b>PZB:</b> Polished Bronze	<input type="checkbox"/> <b>SCP:</b> Sponged Copper	<input type="checkbox"/> <b>SCA:</b> Satin Copper	<input type="checkbox"/>
	<input type="checkbox"/> <b>CSB:</b> Custom Brass*	<input type="checkbox"/> <b>CSP:</b> Custom Paint*	<input type="checkbox"/> <b>CSA:</b> Custom Aluminum*	<input type="checkbox"/>

OPTIONS	<input type="checkbox"/> <b>L38:</b> 38wLED Downlight	<input type="checkbox"/>	<input type="checkbox"/> <b>SPR:</b> Surge protector
	<input type="checkbox"/> <b>L52:</b> 52wLED Downlight	<input type="checkbox"/>	<input type="checkbox"/> <b>IEM:</b> Integral Emer.Ballast
	<input type="checkbox"/> <b>L83:</b> 83wLED Downlight	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/> <b>DIM:</b> Dimming Driver (std)	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/> <b>REM:</b> Remote Emer.Driver	<input type="checkbox"/>	<input type="checkbox"/>