



Catford

PD-16000~PD-16021

Our Catford fixtures are made from metal straps that have been rolled and joined on the ends to form a globe. The straps are like meridians you would see on a true world globe. And they are overlaid with wood veneer strips for a complete two-toned effect. These are ball shaped pendants, sconces, and chandeliers. We build them for chic restaurants, contemporary hospitals, and public buildings needing a boost in creative surroundings. Catford lights can be screw in LED or modular LED with the drivers mounted in canopy or the cylinder fitters. Very nice, spacious fixtures.

~Catford Series~

Chandelier: CH-16001~CH-16015

Pendant: PD-16000~PD-16021

Ceiling Mt: CL-16000~CL-16008

Wall Mt: SC-16000~SC-16011

Bollard: BL-16000~BL-16011

Mounting: Lightsmith fixtures mount to standard 4" octagon electrical boxes unless otherwise specified. All hardware and canopies supplied.

Listing and Warranty: Lightsmith fixtures are Underwriters Laboratories listed and carry a standard three year warranty against defects in materials and labor beginning at date of shipment.



Fixture Specifications

PD-160
FIXTURE NUMBER
(Example: PD-16000)

~ **DIFFUSER**
(Example: WOA-ECH)


~ **METAL FINISH**
(Example: ABB)

~ **VOLTAGE**
 (120V)
 (277V)
 (347V)

~ **STEM=**S+Lgth
(Example: S-96")
CHAIN=C+Lgth
(Example: C-96")
NR=Not required

~ **OPTIONS**
(Example: DIM, REM)

~ **MODIFICATIONS**
(Example: Custom Paint*)
Use "Notes" Box At Top To Explain Modifications

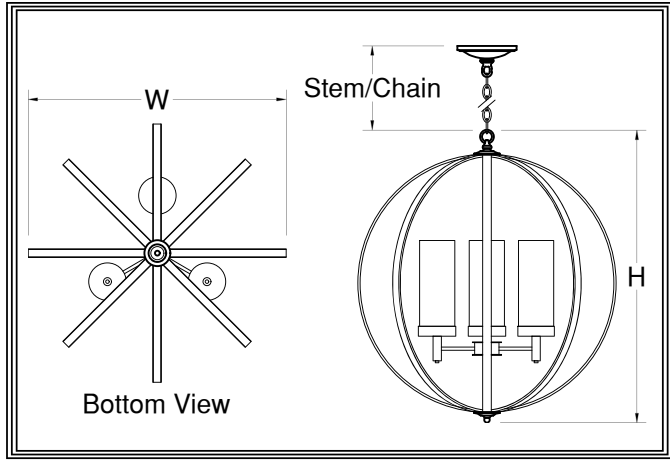

PD-160

Fixture Number Job Type

Job Name

Notes~Modifications

	Fixture Number	Dimensions	Lamping	Weight	Stem/Chain	Options
LED	<input type="checkbox"/> PD-16009	24w x 27h	3-13wL(4230 lm)	13 lbs	3' Std	IEM, REM, SPR**
	<input type="checkbox"/> PD-16010	30w x 34h	3-13wL(4230 lm)	21 lbs	6' Std	L313, L52
	<input type="checkbox"/> PD-16011	36w x 41h	3-13wL(4230 lm)	25 lbs	9' Std	L313, L52
	<input type="checkbox"/> PD-16012	48w x 55h	6-13wL(8460 lm)	27 lbs	9' Std	L323, L83
	<input type="checkbox"/> PD-16013	60w x 68h	8-13wL(11280 lm)	33 lbs	12' Std	L323, L83
INCANDESCENT	<input type="checkbox"/> PD-16020	24w x 27h	3-75wA(3600 lm)	11 lbs	3' Std	L38
	<input type="checkbox"/> PD-16000	30w x 34h	3-75wA(3600 lm)	17 lbs	6' Std	L52
	<input type="checkbox"/> PD-16021	36w x 41h	3-75wA(3600 lm)	19 lbs	9' Std	L52
	<input type="checkbox"/> PD-16001	48w x 55h	6-75wA(7200 lm)	25 lbs	9' Std	L83
	<input type="checkbox"/> PD-16002	60w x 68h	8-75wA(9600 lm)	30 lbs	12' Std	L83
FLUORESCENT	<input type="checkbox"/>					

~Single Circuit Standard Wiring~

**All LED Fixtures

DIFFUSER

WOA: White Opal Acrylic

	SOLID BRASS FINISHES	PAINTED METAL FINISHES	ALUMINUM FINISHES	STAINLESS STEEL FINISHES
METAL FINISH	<input type="checkbox"/> ABB: Antique Brass	<input type="checkbox"/> DGP: Dark Green	<input type="checkbox"/> SAA: Satin Aluminum	<input type="checkbox"/> NA
	<input type="checkbox"/> SBB: Satin Brass	<input type="checkbox"/> VGP: Verde Green	<input type="checkbox"/> SNA: Satin Nickel	<input type="checkbox"/>
	<input type="checkbox"/> PBB: Polished Brass	<input type="checkbox"/> CGP: Charcoal Gray	<input type="checkbox"/> PAA: Polished Aluminum	<input type="checkbox"/>
	<input type="checkbox"/> ANB: Antique Nickel	<input type="checkbox"/> MBP: Medium Bronze	<input type="checkbox"/> BBA: Burnished Bronze	<input type="checkbox"/>
	<input type="checkbox"/> SNB: Satin Nickel	<input type="checkbox"/> SBP: Satin Black	<input type="checkbox"/> RNA: Red Naval Bronze	<input type="checkbox"/>
	<input type="checkbox"/> PNB: Polished Nickel	<input type="checkbox"/> DBP: Dark Bronze	<input type="checkbox"/> SGA: Satin Gold	<input type="checkbox"/>
	<input type="checkbox"/> AZB: Antique Bronze	<input type="checkbox"/> LBP: Light Bronze	<input type="checkbox"/> SBA: Satin Bronze	<input type="checkbox"/>
	<input type="checkbox"/> SZB: Satin Bronze	<input type="checkbox"/> MGP: Medium Gold	<input type="checkbox"/> ORA: Oil Rubbed Bronze	<input type="checkbox"/>
	<input type="checkbox"/> PZB: Polished Bronze	<input type="checkbox"/> SCP: Sponged Copper	<input type="checkbox"/> SCA: Satin Copper	<input type="checkbox"/>
	<input type="checkbox"/> CSB: Custom Brass*	<input type="checkbox"/> CSP: Custom Paint*	<input type="checkbox"/> CSA: Custom Aluminum*	<input type="checkbox"/>

OPTIONS

L38: 38wLED R40 Downlight

L52: 52wLED R40 Downlight

L83: 83wLED R40 Downlight

DIM: Dimming Driver (std)

REM: Remote Emer.Driver

L313: 3-13wCLEU Uplight

L323: 3-23wCLEU Uplight

SPR: Surge protector

IEM: Integral Emer.Ballast