



Peplan

PD-6400~PD-6421

Our Peplan fixtures are simple and elegant expressions of lean lighting design. They feature a hand-spun deep cap at top that holds three metal bars which encase the acrylic cylinder. The cylinder itself is a seamless extrusion meant to provide perfect, even illumination in all directions. We build Peplan fixtures in all standard forms: pendants, chandeliers, ceiling, and sconces. They may be made from solid brass, or aluminum. And finishes are extremely durable and adaptable to all locations. Our modular LEDs are as powerful as they are efficient.

~Peplan Series~

Chandelier: CH-6401~CH-6415

Pendant: PD-6400~PD-6421

Ceiling Mt: CL-6400~CL-6408

Wall Mt: SC-6400~SC-6411

Bollard: BL-6400~BL-6411

Mounting: Lightsmith fixtures mount to standard 4" octagon electrical boxes unless otherwise specified. All hardware and canopies supplied.

Listing and Warranty: Lightsmith fixtures are Underwriters Laboratories listed and carry a standard three year warranty against defects in materials and labor beginning at date of shipment.



Fixture Specifications

PD-64

FIXTURE NUMBER
(Example: PD-6400)

~

DIFFUSER
(Example: WOA-ECH)

OPTIONS

- L23: 23wLED R30 Downlight
- L38: 38wLED R40 Downlight
- L52: 52wLED R40 Downlight
- DIM: Dimming Driver (std)
- REM: Remote Emer.Ballast

BLC: Canopy Driver (std)

- SPR: Surge protector
- CEM: Canopy Emer.Ballast


METAL FINISH
(Example: ABB)

VOLTAGE
(120V)
(277V)
(347V)

STEM=S+Lgth
(Example:S-96")
CHAIN=C+Lgth
(Example:C-96")
NR=Not required

OPTIONS
(Example:DIM,REM)

MODIFICATIONS
(Example:Custom Paint*)
Use "Notes" Box At Top To Explain Modifications

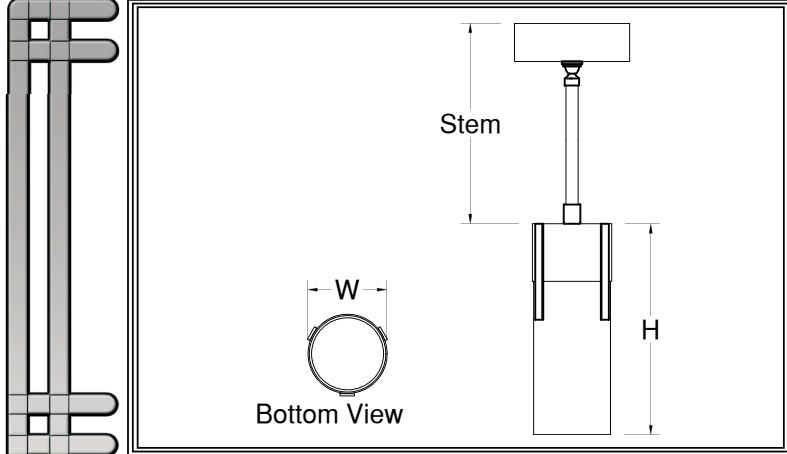

PD-64

Fixture Number

Job Type

Job Name

Notes~Modifications

Fixture Number	Dimensions	Lamping	Weight	Cables	Options
<input type="checkbox"/> PD-6409	4w x 11h	2-13wL(2820 lm)	6 lbs	3' Std	CEM,REM,SPR**
<input type="checkbox"/> PD-6410	4w x 16h	2-13wL(2820 lm)	8 lbs	3' Std	L23
<input type="checkbox"/> PD-6411	6w x 22h	4-13wL(5640 lm)	10 lbs	6' Std	L38
<input type="checkbox"/> PD-6412	6w x 27h	8-13wL(11280 lm)	12 lbs	6' Std	L38
<input type="checkbox"/> PD-6413	8w x 33h	12-13wL(16920 lm)	15 lbs	6' Std	L52
 <input type="checkbox"/> LED					
 <input type="checkbox"/> INCANDESCENT					
 <input type="checkbox"/> PD-6420	4w x 11h	1-60wA(800 lm)	4 lbs	3' Std	L23
<input type="checkbox"/> PD-6400	4w x 16h	1-75wA(1200 lm)	6 lbs	3' Std	L23
<input type="checkbox"/> PD-6421	6w x 22h	1-100wA(1740 lm)	8 lbs	6' Std	L38
<input type="checkbox"/> PD-6401	6w x 27h	2-100wA(3480 lm)	10 lbs	6' Std	L38
<input type="checkbox"/> PD-6402	8w x 33h	4-100wA(6960 lm)	13 lbs	6' Std	L52

~Single Circuit Standard Wiring~

**All LED Fixtures

<input type="checkbox"/> WOA: White Opal Acrylic (std)	<input type="checkbox"/>	<input type="checkbox"/> ECH: Etched*
*Etched option creates a matte, non-glossy finish on one side of the diffuser. (Example:WOA-ECH)		

SOLID BRASS FINISHES	PAINTED METAL FINISHES	ALUMINUM FINISHES	STAINLESS STEEL FINISHES
<input type="checkbox"/> ABB: Antique Brass	<input type="checkbox"/> DGP: Dark Green	<input type="checkbox"/> SAA: Satin Aluminum	<input type="checkbox"/> NA
<input type="checkbox"/> SBB: Satin Brass	<input type="checkbox"/> VGP: Verde Green	<input type="checkbox"/> SNA: Satin Nickel	<input type="checkbox"/>
<input type="checkbox"/> PBB: Polished Brass	<input type="checkbox"/> CGP: Charcoal Gray	<input type="checkbox"/> PAA: Polished Aluminum	<input type="checkbox"/>
<input type="checkbox"/> ANB: Antique Nickel	<input type="checkbox"/> MBP: Medium Bronze	<input type="checkbox"/> BBA: Burnished Bronze	<input type="checkbox"/>
<input type="checkbox"/> SNB: Satin Nickel	<input type="checkbox"/> SBP: Satin Black	<input type="checkbox"/> RNA: Red Naval Bronze	<input type="checkbox"/>
<input type="checkbox"/> PNB: Polished Nickel	<input type="checkbox"/> DBP: Dark Bronze	<input type="checkbox"/> SGA: Satin Gold	<input type="checkbox"/>
<input type="checkbox"/> AZB: Antique Bronze	<input type="checkbox"/> LBP: Light Bronze	<input type="checkbox"/> SBA: Satin Bronze	<input type="checkbox"/>
<input type="checkbox"/> SZB: Satin Bronze	<input type="checkbox"/> MGP: Medium Gold	<input type="checkbox"/> ORA: Oil Rubbed Bronze	<input type="checkbox"/>
<input type="checkbox"/> PZB: Polished Bronze	<input type="checkbox"/> SCP: Sponged Copper	<input type="checkbox"/> SCA: Satin Copper	<input type="checkbox"/>
<input type="checkbox"/> CSB: Custom Brass*	<input type="checkbox"/> CSP: Custom Paint*	<input type="checkbox"/> CSA: Custom Aluminum*	<input type="checkbox"/>

<input type="checkbox"/> L23: 23wLED R30 Downlight	<input type="checkbox"/> BLC: Canopy Driver (std)	<input type="checkbox"/> SPR: Surge protector
<input type="checkbox"/> L38: 38wLED R40 Downlight	<input type="checkbox"/>	<input type="checkbox"/> CEM: Canopy Emer.Ballast
<input type="checkbox"/> L52: 52wLED R40 Downlight	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> DIM: Dimming Driver (std)	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> REM: Remote Emer.Ballast	<input type="checkbox"/>	<input type="checkbox"/>