



## Nottoway

### 1901-PC~1917-PC

Our Nottoway fixtures are just a little space-age oriented. We have actually built a hidden meaning into the frame. Our three heavy side staves and three metal top rings are meant to be a clear Trinity/Cross motif for those looking for inspiration. The lights themselves are completely sturdy from the rigidity of the metal framework and they tend to be longer than most cylinder fixtures. We offer a wide variety of metal finishes. Satin Aluminum is shown on the pendant, but Dark Bronze looks just great in the right room. Take advantage of our LED options if you don't want to be changing lamps for the next 20 years.

### Nottoway Series~

Chandelier:1941-CHC~1973-CHC

Pendant:1901-PC~1917-PC

Ceiling Mount:1902-CC~1913-CC

Wall Mount:1901-WC~1913-WC

S-Pendant:1902-SC~1913-SC

**Mounting:** Lightsmith fixtures mount to standard 4" octagon electrical boxes unless otherwise specified. All hardware and canopies supplied.

**Listing and Warranty:** Lightsmith fixtures are Underwriters Laboratories listed and carry a standard three year warranty against defects in materials and labor beginning at date of shipment.



### Fixture Specifications

19\_\_\_\_-PC

FIXTURE NUMBER  
(Example: 1901-PC)


DIFFUSER  
(Example: BGA-ECH)

OPTIONS

- N250: 250wPar38 Downlight
- N300: 300wPar56 Downlight
- N500: 500wPar56 Downlight
- DIM: Dimming Ballast
- REM: Remote Emer.Ballast

- L311: 3-11wCLED Uplight
- L611: 6-11wCLED Uplight
- L423: 4-23wCLED Downlight
- L623: 6-23wCLED Downlight
- L823: 8-23wCLED Downlight

- FUS: Fusing
- IEM: Integral Emer.Ballast
- DALI: Dali dimming LED

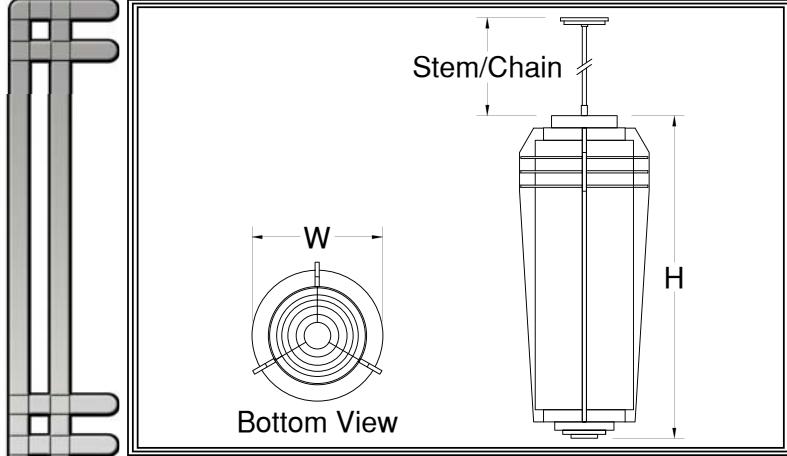

19\_\_\_\_-PC

Fixture Number

Job Type

Job Name

Notes~Modifications

Fixture Number	Dimensions	Lamping	Weight	Stem/Chain	Options
1901-PC	12w x 20h	2-13wLLED	9 lbs	3' Std	DALI,REM,FUS**
1902-PC	14w x 24h	4-13wLLED/1-38wCLED	13 lbs	6' Std	L423,L623
1903-PC	14w x 30h	6-13wLLED/1-38wCLED	15 lbs	9' Std	L423,L623,L311
1904-PC	16w x 36h	12-13wLLED/1-52wCLED	17 lbs	9' Std	L623,L823,L611
1905-PC	16w x 42h	18-13wLLED/1-52wCLED	19 lbs	12' Std	L623,L823,L611
1908-PC	12w x 20h	1-150wA	6 lbs	3' Std	N250
1910-PC	14w x 24h	3-75wA/1-250wP38	10 lbs	6' Std	N300
1912-PC	14w x 30h	6-75wA/1-250wP38	12 lbs	9' Std	N300
1914-PC	16w x 36h	6-75wA/1-500wR40	14 lbs	9' Std	N500
1916-PC	16w x 42h	9-75wA/1-500wR40	16 lbs	12' Std	N500
1909-PC	12w x 20h	1-42wCFT	8 lbs	3' Std	DIM,IEM,REM,FUS*
1911-PC	14w x 24h	2-42wCFT/2-42wCFTdn	12 lbs	6' Std	L311
1913-PC	14w x 30h	4-42wCFT/2-42wCFTdn	14 lbs	9' Std	L311
1915-PC	16w x 36h	6-FT40w/4-42wCFTdn	16 lbs	9' Std	L611
1917-PC	16w x 42h	6-FT50w/4-42wCFTdn	18 lbs	12' Std	L611

~Two Circuits Standard Wiring~

\*All Fluorescent Fixtures

\*\*All LED Fixtures

<input type="checkbox"/> BGA: Beige Alabaster Acrylic	<input type="checkbox"/> GRA: Green Edge Acrylic	<input type="checkbox"/> ECH: Etched*	
<input type="checkbox"/> NHA: Natural Horn Acrylic	<input type="checkbox"/> EGA: Earth Green Acrylic	*Etched option creates a matte, non-glossy finish on one side of the diffuser. (Example:WOA-ECH)	
<input type="checkbox"/> WHA: White Alabaster Acrylic	<input type="checkbox"/> DGA: Deep Gold Acrylic		
<input type="checkbox"/> HNA: Honey Alabaster Acrylic	<input type="checkbox"/> SBA: Sea Blue Acrylic		
<input type="checkbox"/> WOA: White Opal Acrylic	<input type="checkbox"/> PHA: Purple Haze Acrylic		

<input type="checkbox"/> SOLID BRASS FINISHES	<input type="checkbox"/> PAINTED METAL FINISHES	<input type="checkbox"/> ALUMINUM FINISHES	<input type="checkbox"/> STAINLESS STEEL FINISHES
<input type="checkbox"/> ABB: Antique Brass	<input type="checkbox"/> DGP: Dark Green	<input type="checkbox"/> SAA: Satin Aluminum	<input type="checkbox"/> SSS: Satin
<input type="checkbox"/> SBB: Satin Brass	<input type="checkbox"/> VGP: Verde Green	<input type="checkbox"/> SNA: Satin Nickel	<input type="checkbox"/> DSS: Distressed
<input type="checkbox"/> PBB: Polished Brass	<input type="checkbox"/> CGP: Charcoal Gray	<input type="checkbox"/> PAA: Polished Aluminum	<input type="checkbox"/> PSS: Polished
<input type="checkbox"/> ANB: Antique Nickel	<input type="checkbox"/> MBP: Medium Bronze	<input type="checkbox"/> BBA: Burnished Bronze	<input type="checkbox"/> HSS: Hammered
<input type="checkbox"/> SNB: Satin Nickel	<input type="checkbox"/> SBP: Satin Black	<input type="checkbox"/> RNA: Red Naval Bronze	<input type="checkbox"/>
<input type="checkbox"/> PNB: Polished Nickel	<input type="checkbox"/> DBP: Dark Bronze	<input type="checkbox"/> SGA: Satin Gold	<input type="checkbox"/>
<input type="checkbox"/> AZB: Antique Bronze	<input type="checkbox"/> LBP: Light Bronze	<input type="checkbox"/> SBA: Satin Bronze	<input type="checkbox"/>
<input type="checkbox"/> SZB: Satin Bronze	<input type="checkbox"/> MGP: Medium Gold	<input type="checkbox"/> ORA: Oil Rubbed Bronze	<input type="checkbox"/>
<input type="checkbox"/> PZB: Polished Bronze	<input type="checkbox"/> SCP: Sponged Copper	<input type="checkbox"/> SCA: Satin Copper	<input type="checkbox"/>
<input type="checkbox"/> CSB: Custom Brass*	<input type="checkbox"/> CSP: Custom Paint*	<input type="checkbox"/> CSA: Custom Aluminum*	<input type="checkbox"/> CSS: Custom SS*

<input type="checkbox"/> FIXTURE NUMBER (Example: 1901-PC)	<input type="checkbox"/> DIFFUSER (Example: BGA-ECH)	<input type="checkbox"/> METAL FINISH (Example: ABB)	<input type="checkbox"/> VOLTAGE (120V) (277V) (347V)	<input type="checkbox"/> STEM+C+Lgth (Example:S-96")	<input type="checkbox"/> OPTIONS (Example:DIM,REM)	<input type="checkbox"/> MODIFICATIONS (Example:Custom Paint*) Use "Notes" Box At Top To Explain Modifications
~	~	~	~	~	~	~