



# Ruckers

## CH-30900~CH-30931

Our Ruckers fixtures are large rings made from overlapping thick metal straps and acrylic or glass cylinder diffusers. Ruckers are made from scratch in our Lightsmith shop every time. So we can pretty much build them in as big a diameter as anyone can imagine. And they come in tiers as well. Standard five tier units can be almost 10' tall and 12' in diameter. Just right for a castle or a sanctuary with stone finished interior. We show them as totally electric, but with a good winch system, these lights can be built with real candles for places needing just the right touch of historical accuracy.

### ~Ruckers Series~

Chandelier: CH-30900~CH-30931

Pendant:


Ceiling Mt.:

Wall Mt: SC-30900~SC-30911

Bollard:


**Mounting:** Lightsmith fixtures mount to standard 4" octagon electrical boxes unless otherwise specified. All hardware and canopies supplied.

**Listing and Warranty:** Lightsmith fixtures are Underwriters Laboratories listed and carry a standard three year warranty against defects in materials and labor beginning at date of shipment.



**CH-309** ~

FIXTURE NUMBER (Example: CH-30900) ~ DIFFUSER (Example: WOA)

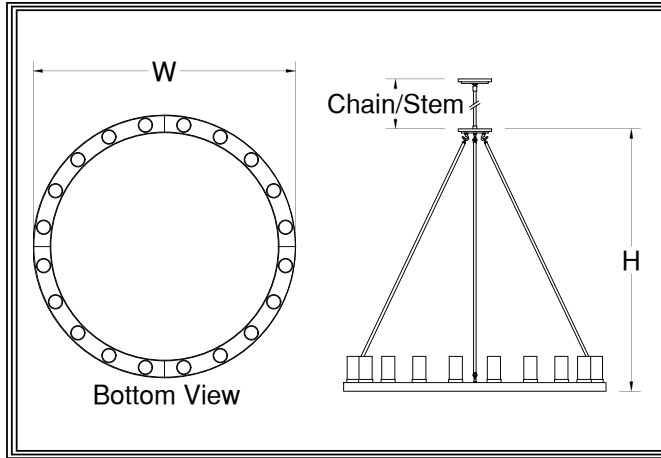

**CH-309**

Fixture Number Job Type

Job Name

Notes~Modifications

LED	Fixture Number	Dimensions	Lamping (20w Med Bs Max)	Weight	Chain	Options
<input type="checkbox"/>	CH-30909	36w x 36h	10 Arms/1 tier 10	14 lbs	3' Std	WOA,L23
<input type="checkbox"/>	CH-30910	48w x 48h	15 Arms/1 tier 15	19 lbs	6' Std	WOA,L23
<input type="checkbox"/>	CH-30911	60w x 60h	20 Arms/1 tier 20	30 lbs	6' Std	WOA,L23
<input type="checkbox"/>	CH-30912	36w x 52h	15 Arms/2 tiers 10/5	38 lbs	9' Std	WOA,L38
<input type="checkbox"/>	CH-30913	48w x 64h	20 Arms/2 tiers 12/8	43 lbs	9' Std	WOA,L38
<input type="checkbox"/>	CH-30920	60w x 76h	25 Arms/2 tiers 15/10	50 lbs	9' Std	WOA,L38
<input type="checkbox"/>	CH-30900	72w x 88h	30 Arms/2 tiers 20/10	59 lbs	9' Std	WOA,L38
<input type="checkbox"/>	CH-30921	48w x 80h	35 Arms/3 tiers 20/10/5	72 lbs	9' Std	WOA,L52
<input type="checkbox"/>	CH-30901	60w x 92h	40 Arms/3 tiers 20/10/10	98 lbs	9' Std	WOA,L52
<input type="checkbox"/>	CH-30902	84w x 116h	45 Arms/3 tiers 30/10/5	129 lbs	9' Std	WOA,L52
<input type="checkbox"/>	CH-30930	96w x 128h	50 Arms/3 tiers 30/10/10	137 lbs	9' Std	WOA,L52
<input type="checkbox"/>	CH-30903	96w x 144h	55 Arms/4 tiers 30/10/10/5	169 lbs	12' Std	WOA,L83
<input type="checkbox"/>	CH-30931	120w x 168h	60 Arms/4 tiers 35/10/10/5	204 lbs	12' Std	WOA,L83
<input type="checkbox"/>	CH-30904	120w x 168h	65 Arms/4 tiers 40/10/10/5	248 lbs	12' Std	WOA,L83
<input type="checkbox"/>	CH-30905	144w x 208h	70 Arms/5 tiers 40/10/10/5/5	337 lbs	12' Std	WOA,L83

~Multi-Circuits Standard Wiring~

DIFFUSER

WOG: White Opal Glass (std)

WOA: White Opal Acrylic

METAL FINISH

SOLID BRASS FINISHES	PAINTED METAL FINISHES	ALUMINUM FINISHES	STAINLESS STEEL FINISHES
<input type="checkbox"/> ABB: Antique Brass	<input type="checkbox"/> DGP: Dark Green	<input type="checkbox"/> SAA: Satin Aluminum	<input type="checkbox"/> NA
<input type="checkbox"/> SBB: Satin Brass	<input type="checkbox"/> VGP: Verde Green	<input type="checkbox"/> SNA: Satin Nickel	<input type="checkbox"/>
<input type="checkbox"/> PBB: Polished Brass	<input type="checkbox"/> CGP: Charcoal Gray	<input type="checkbox"/> PAA: Polished Aluminum	<input type="checkbox"/>
<input type="checkbox"/> ANB: Antique Nickel	<input type="checkbox"/> MBP: Medium Bronze	<input type="checkbox"/> BBA: Burnished Bronze	<input type="checkbox"/>
<input type="checkbox"/> SNB: Satin Nickel	<input type="checkbox"/> SBP: Satin Black	<input type="checkbox"/> RNA: Red Naval Bronze	<input type="checkbox"/>
<input type="checkbox"/> PNB: Polished Nickel	<input type="checkbox"/> DBP: Dark Bronze	<input type="checkbox"/> SGA: Satin Gold	<input type="checkbox"/>
<input type="checkbox"/> AZB: Antique Bronze	<input type="checkbox"/> LBP: Light Bronze	<input type="checkbox"/> SBA: Satin Bronze	<input type="checkbox"/>
<input type="checkbox"/> SZB: Satin Bronze	<input type="checkbox"/> MGP: Medium Gold	<input type="checkbox"/> ORA: Oil Rubbed Bronze	<input type="checkbox"/>
<input type="checkbox"/> PZB: Polished Bronze	<input type="checkbox"/> SCP: Sponged Copper	<input type="checkbox"/> SCA: Satin Copper	<input type="checkbox"/>
<input type="checkbox"/> CSB: Custom Brass*	<input type="checkbox"/> CSP: Custom Paint*	<input type="checkbox"/> CSA: Custom Aluminum*	<input type="checkbox"/>

OPTIONS

L23: 23wCled Dnlt (2790 lm)

L38: 23wCled Dnlt (5734 lm)

L52: 52wCled Dnlt (9375 lm)

L83: 83wCled Dnlt (12597 lm)

CH-309 ~  ~  ~ 120v ~  ~  ~

FIXTURE NUMBER (Example: CH-30900) ~ DIFFUSER (Example: WOA) ~ METAL FINISH (Example: ABB) ~ VOLTAGE (120V) ~ STEM=S+Lgth (Example:S-96") CHAIN=C+Lgth (Example:C-96") NR=Not required ~ OPTIONS (Example:DNLT) ~ MODIFICATIONS (Example:Custom Brass\*) Use "Notes" Box At Top To Explain Modifications